





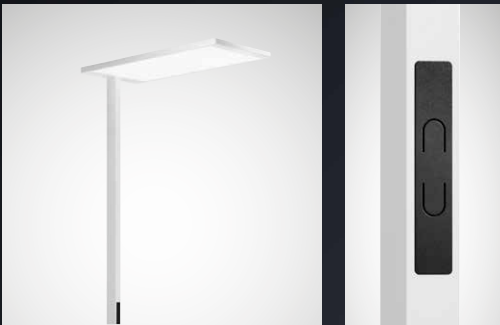

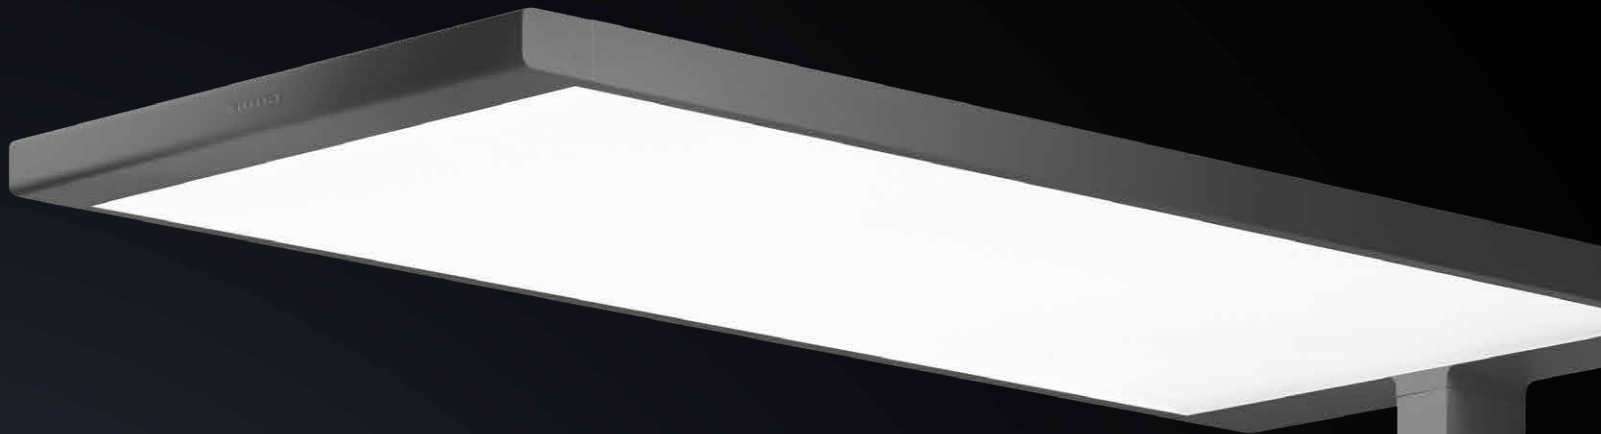


# LUCEOS FREE-STANDING LUMINAIRES

## TECHNICAL FEATURES












### BASE

-  **Lighting technology**  
DALI dimmable without sensors  
BS... ETDD...
-  **Control**  
Direct & indirect can be controlled together
-  **Sensors**  
-
-  **BLE / App**  
-
-  **Networking options**  
-
-  **Luminaire colour**  
White / Silver / Black
-  **Luminous flux**  
approx. 12,000 lm
-  **Colour temperature**  
3,000 K, 4,000 K
-  **Switches**  
Double switch

CE IP20












### SENSE BASE

-  **Lighting technology**  
DALI dimmable with daylight  
and PIR presence sensor  
BS... ETDS...
-  **Control**  
Direct & indirect can be controlled together
-  **Sensors**  
Daylight & PIR presence (limited adjustability)
-  **BLE / App**  
-
-  **Networking options**  
-
-  **Luminaire colour**  
White / Silver / Black
-  **Luminous flux**  
approx. 12,000 lm
-  **Colour temperature**  
3,000 K / 4,000 K / 2,700 K - 6,500 K
-  **Switches**  
Double switch / 3 non-illuminated switches  
Image top left: for monochrome light colour version  
Image top right: for tunable white versions  
2,700 K - 6,500 K

CE IP20












### SENSE SMART READY

-  **Lighting technology**  
DALI dimmable with daylight and PIR presence  
sensor + option for swarm networking  
...ETDS...
-  **Control**  
Direct & indirect can be controlled separately
-  **Sensors**  
Daylight & PIR presence (limited adjustability)
-  **BLE / App**  
-
-  **Networking options**  
Retrofit-capable group formation via swarm module
-  **Luminaire colour**  
White / Silver / Black
-  **Luminous flux**  
approx. 16,500 lm
-  **Colour temperature**  
3,000 K / 4,000 K / 2,700 K - 6,500 K
-  **Switches**  
Double switch / 3 non-illuminated switches  
Image top left: for monochrome light colour version  
Image top right: for tunable white versions  
2,700 K - 6,500 K

CE IP20



### SMART PLUS

-  **Lighting technology**  
Internal dimming protocol incl. daylight and  
HF presence sensor + app control and integrated  
networking
-  **Control**  
Direct & indirect can be controlled separately
-  **Sensors**  
Daylight & PIR presence (detailed adjustability)
-  **BLE / App**  
Live Link Workplace app control & configuration
-  **Networking options**  
Integrated group formation via BLE mesh network
-  **Luminaire colour**  
White / Silver / Black
-  **Luminous flux**  
approx. 16,500 lm
-  **Colour temperature**  
3,000 K / 4,000 K / 2,700 K - 6,500 K (HCL)
-  **Switches**  
White / Silver / Black

CE IP20

Country-specific distinction via pluggable connecting cable.